
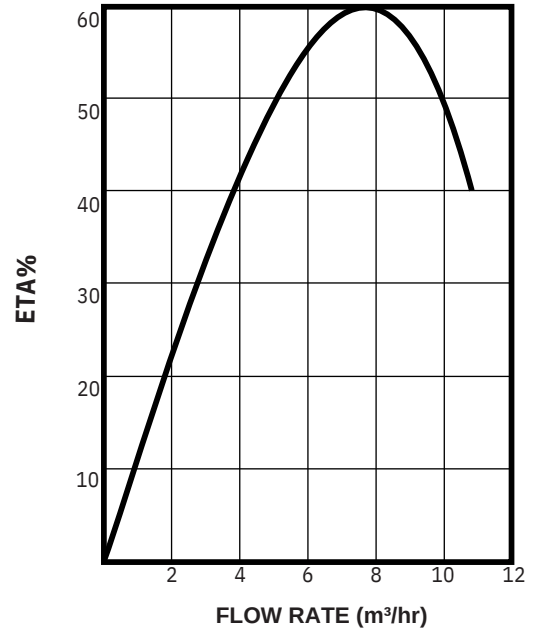
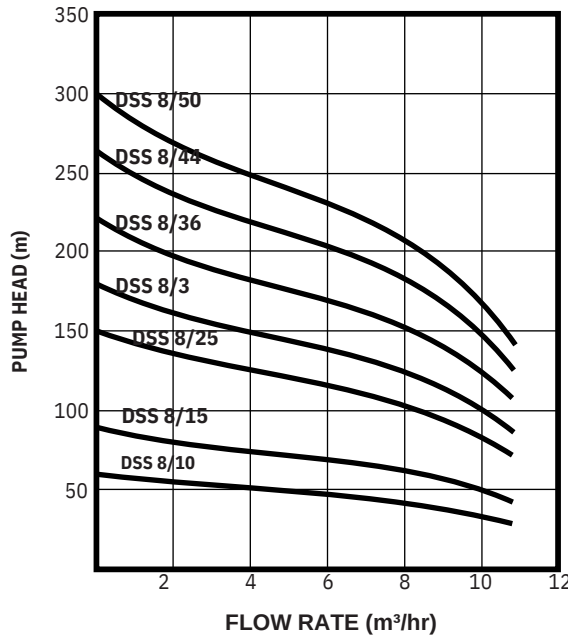


## DSS 8 Multistage Centrifugal Borehole Pump

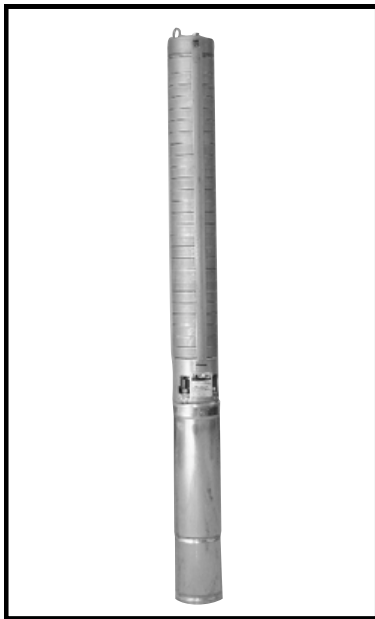

### Typical Applications

DAYLIFF DSS submersible pumps are designed specifically for borehole supply applications. They are of multistage centrifugal impeller design and all parts are made from standard AISI304 stainless steel with water lubricated rubber bearings. A submersible motor is fitted beneath the pump and suction is effected through a strainer between the pump and motor.

#### MOTOR

The pump is coupled to a sealed liquid cooled 2-pole asynchronous squirrel-cage motor constructed of stainless steel. Single phase motors should be supplied with purpose designed Dayliff SCM control boxes for operation and protection against overload, dry running and over/under voltage. Three phase motors require a remote DOL starter; A DAYLIFF SCT electronic Pump Controller is recommended for comprehensive pump control including low level, motor overload and irregular power supply protection.

**Enclosure Class:** IP68

**Insulation Class:** F

**Speed:** 2900 rpm

#### OPERATING CONDITIONS

**Pumped Liquid:** Thin, clean, chemically non-aggressive liquids with a maximum sand content of 0.25%

**Max Liquid Temperature:** +50°C

**Max Water Depth:** 200m

**Minimum Borehole Diameter:** 110mm

### Technical Data

Model	Motor		Full Load Current (A)		Start Current (A)		Dimensions (mm)				Weight (kg)	
							A		B			C
	kW	HP	1x240V	3x415V	1x240V	3x415V	1x240V	3x415V				
DSS 8/10	1.5	2	11.5	-	46	-	449	-	1074	625	625	19
DSS 8/15	2.2	3	15.5	6	62	42	542	514	1377	1349	835	25
DSS 8/25	4	5.5	-	10	-	70	-	622	-	1835	1835	34
DSS 8/30	5.5	7.5	-	13	-	91	-	678	-	2203	1465	38
DSS 8/36			-		-		718	-	2143	1717	43	
DSS 8/44	7.5	10	-	15	-	105	-	768	-	2632	1864	46
DSS 8/50			-		-		768	-	2758	1990	49	

